

Ultra-compact isolated DC/DC converters (modules) are specially designed for industrial applications and harsh environment operation. These compact units (117 x 61 x 13 mm) have output power up to 600 W and wide operating temperature range up to -60...+130°C.

Modules can be switched on and off by command, are provided with full complex of protections as following: output over-current, short-circuit, over-heat.

Completely replace the modules Vicor, family Maxi.



Features

- Class: Expert, power density up to **6 478 W/dm³** (106 W/In³)
- High efficiency $\geq 92\%$
- Low profile 13 mm design
- Standard full brick size
- Case operating temperature range: -40°C...+110°C, for special request up to -60°C...+130°C
- Output power up to 600 W
- Input voltage ranges: 100...200 VDC, 180...375 VDC
- Parallel operation
- Feedback from load
- Output voltage adjustment, remote on/off
- Max capacitance 2000 μ F (Uout=24 VDC)
- Metal case, with mounting holes

For all special requirements placed on the last page of datasheet [please click here.](#)

Ordering information

JETND 600 - 150 S 24 - C T H V

1 2 3 4 5 6 7 8

- 1 - «JETD» Series
- 2 - Max output power, W
- 3 - Input voltages
 - 150 - 150 VDC (100...200 VDC)
 - 300 - 300 VDC (180...375 VDC)
- 4 - Index of output channels quantity
 - S - one
- 5 - Nominal output voltage, VDC (two signs for a channel)
- 6 - Index of case design
 - C - Metal case with mounting holes
- 7 - Index of operating temperature range of the case
 - T -40°C...+110°C (standard version), for request up to -60°C...+130°C
- 8 - High voltage input
 - HV

Standard models with one output

Module	Input voltage range	Output power	Output voltage / nominal output current
JETND600-150S24-CTHV	100...200 VDC	600 W	24 VDC / 25 A
JETND600-150S27-CTHV			27 VDC / 22,2 A
JETND600-150S48-CTHV			48 VDC / 12,5 A
JETND600-300S24-CTHV	180...375 VDC	600 W	24 VDC / 25 A
JETND600-300S27-CTHV			27 VDC / 22,2 A
JETND600-300S48-CTHV			48 VDC / 12,5 A

Comment: It's possible to produce non-standard output voltages from 12 to 60 V and maximal current 40 A.

Specifications

Input specifications	
Input voltage range / transitional deviation, 1 sec 150	=100...200 VDC / =90...210 VDC
Input voltage range / transitional deviation, 1 sec 300	=180...375 VDC / =175...400 VDC
Input filter	P-type
Output specifications	
Output voltage adjustment (single-channel models only)	±5% Uout
Instability of output voltage in accordance to changing of output current from 10 to 100% for single output model	±2%
Instability of output voltage in accordance to changing of input voltage	±0,5%
Ripple and noise (peak-to-peak) (20 MHz)	<2% Uout
Short circuit protection**	>150% Iout nom, auto repair
Overvoltage protection**	<130 % Uout
Over current protection level**	Pout ... 1.3·Pout
Remote On/Off	Shuts down outputs by applying 0...1,1VDC or connection of output «ON» and «- IN», I≤5mA
Max capacitance for Pout=400 W, Uout=24VDC***	2000 µF
General specifications	
Case temperature (operating) index T	up to -60°C ...+130°C
Case temperature (storage)	-60°C ...+130°C
Output power derating (natural convection)	See diagram
High humidity	100% @35 °C
Thermal resistance case — environment without heat sink	3,6 °C/W
Typical efficiency****	92%
Conversion frequency	300 kHz typ.
Insulation voltage input/output	=1500 VDC
Insulation voltage input/case	=1500 VDC
Insulation voltage output/case	=1000 VDC
Insulation voltage output/output	=500 VDC
Isolation resistance @ 500 VDC	>20 MOhm
EMC standards	EN 55022, class A; EN 55022, class B with additional filter
Safety standards	IEC/ EN 60950
Typical MTBF (Tcase = 50°C; Pout = 0,7 Pout max)	100 000 hrs
Cooling method	Free air convection or forced air cooling
Weight (max)	387 g


* All specifications are valid for normal climatic conditions, Uin.nom., Iout.nom., unless otherwise stated.

** Parameters are stated for the information purposes and could not be used at long term work, exciding maximum output current, at work outside of a range of operating temperatures.

*** For other output voltages the maximum output capacity is calculated from the fact that $C_{max} \times U_{out}^2$ is a constant.

**** Typical efficiency - for input 150 VDC (input range 150), 300 VDC (input range 300) and output 24 VDC.

Maximum power output as a function of ambient temperature

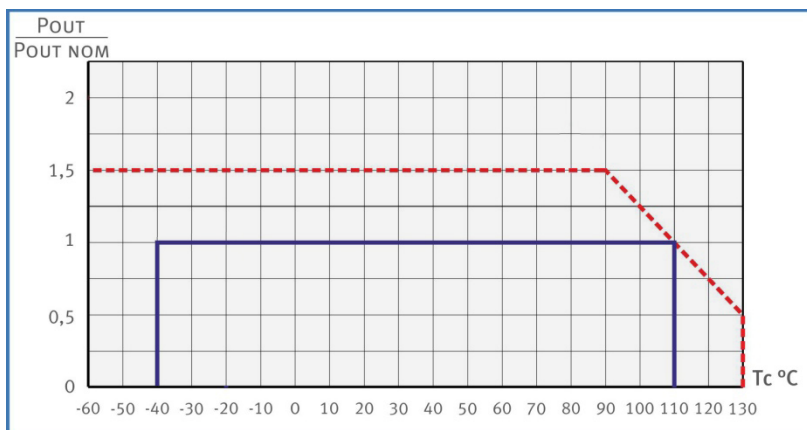


— Allowed power output and case temperature range for standard version of unit.

- - - Possible range of output power for special order.

For modeling optimal heatsink and its delivery, with goal of providing allowed case temperatures, please contact us directly aeps@aeps-group.cz.

Nº Pin	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Single output	Case	Vin+	Vin+	Vin-	Vin-	On/Off	+RS out	Vout+	Vout+	Vout-	Vout-	-RS out	Trim	Paral

Single output model with mounting holes (full brick size)

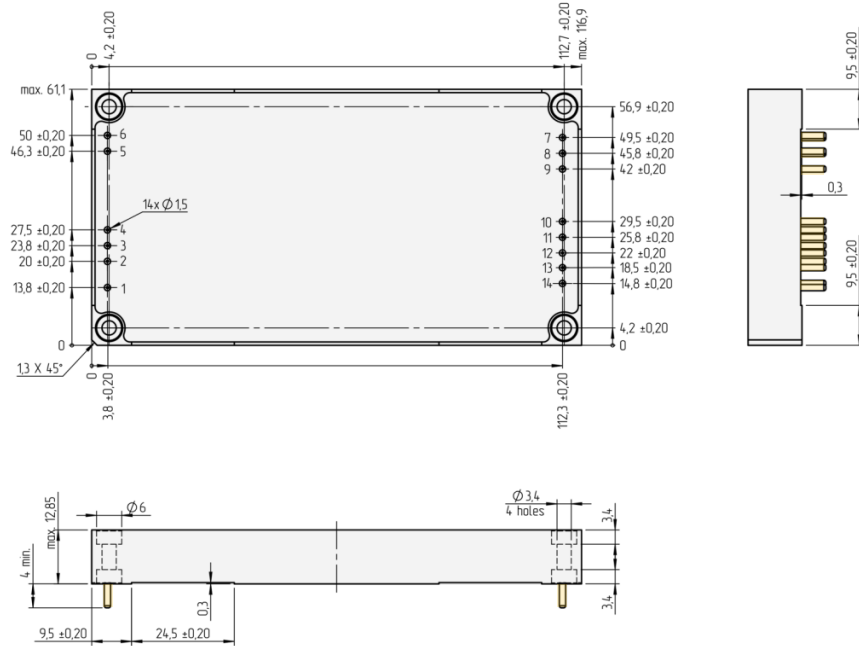

Certificates

CE conformity declaration

Note

The label with sign "remove before use" can be placed on the top surface of the module and must be removed before installation.

Please, note that all information in this material is for reference only. Further detailed information (including: additional requirements, manuals and circuit schemes) is found on our website <http://www.goncharov-jet.com>

<http://www.goncharov-jet.com>, e-mail: contact@goncharov-jet.com, phone/fax: +420 281 001 341

According to company's policy in view of constant improvements of the production design the manufacturer reserves the right to itself change the contents of promotional materials without prior notification.

Special requirements

